
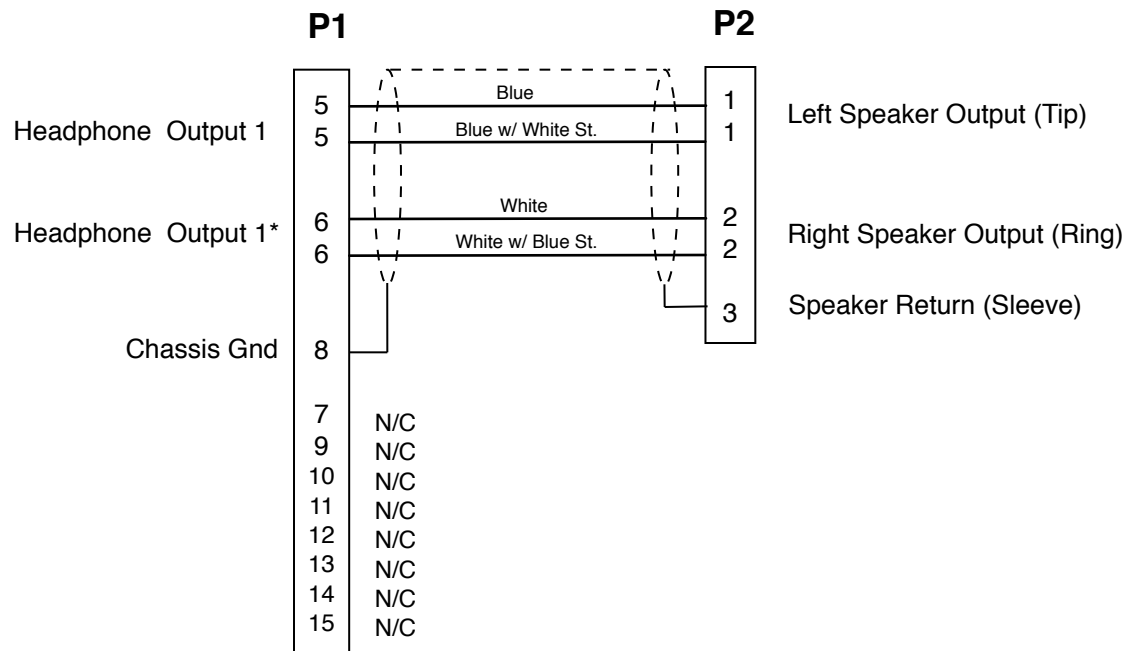


P/N: CA-D15M-P3M-L-A_02

Length in Feet

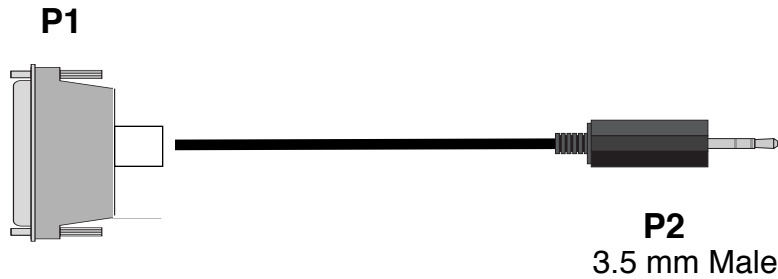

Assembly Notes

(1) P1: Male, metal, DB-15 connector. Includes metal chrome backshell, strain relief & male screwlock assembly.

(2) P2: Male, TRS 3.5mm stereo mini jack, strain relief.


(3) Cable: Low capacitance, individually shielded, star quad, high flex, audio cable. Belden P/N: 1192A

(4) Cable Length specified by value of L in P/N. Units are in feet.

(5) Wire as shown in schematic - note drain wire connections.

(6) Multiple conductor connections designated by repeat pin numbering

Rev	Date	Originator	Description
01	03-07-05	NAK	Original
01	02-22-10	NAK	Corrected male designation in the Assembly Notes

		ADVANCED SIMULATION TECHNOLOGY inc. 500A Huntmar Park Drive, Herndon, VA 20170 www.asti-usa.com
Cage Code	OVFW3	
Title	Audio Interface Cable, - Iris to PC Speaker	
Dwg #	CA-D15M-P3F-L-A_02	
Sheet	1 of 1	