

Cable Layout:


CA-D15M-X6MP-L-B_02

Length in Feet




Requires 1.25-inch dia. minimum mounting hole.
See Switchcraft catalog for mounting details.

Wiring Information:

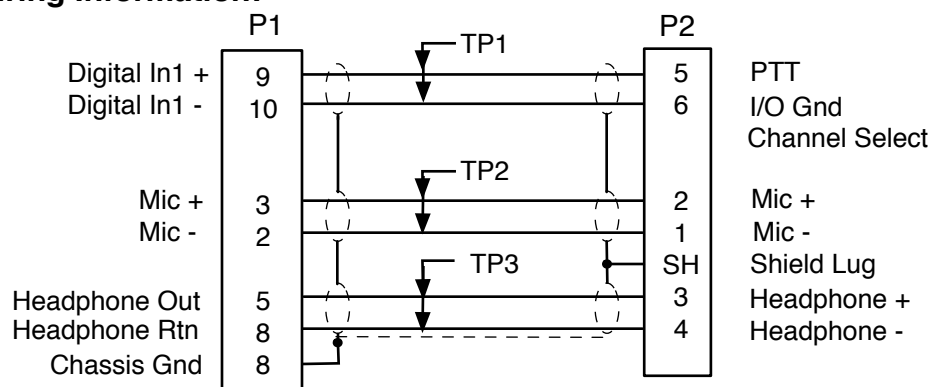

- Notes:**
1. Use high quality supplier such as AMP or equivalent.
 2. Use Switchcraft connector only. No Substitutions. PN#: B6M
 3. Use quality low capacitance, high flex audio cable. Canare MR202-4AT audio cable is to be used.
 4. Cable length "L" defined by length field of part number ordered
 5. Tie ALL shields to Pin 8 at the D15 end. Tie ALL shields to the shield lug at the 6 pin XLR end. Pairs must be connected as shown

Rev	Date	Originator	Description
01	4-18-06	NAK	Original release
02	4-15-09	CJA	Added Information Table



ADVANCED SIMULATION TECHNOLOGY inc.
500A Huntmar Park Drive, Herndon, VA 20170
www.asti-usa.com

Cage Code	OVSFW3
Title	Audio Cable IRIS to 6-pin XLR Panel Mount
Dwg #	CA-D15M-X6MP-L-B_02
Sheet	1 of 1

Industry connector Sub Group	ASTi Part Number Sub Group	Source Device	ASTi Part Number	Current Revision Number	Description & Case Use	Special Notes
DB15	D15*	ACU, ACU2	CA-D15M-X6MP-L-B	02		