
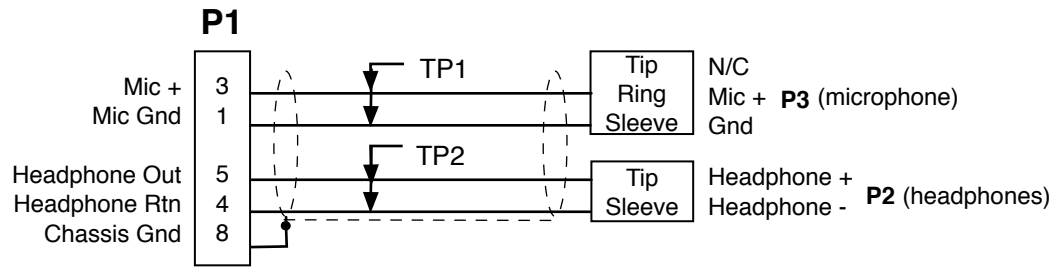


Length in Feet

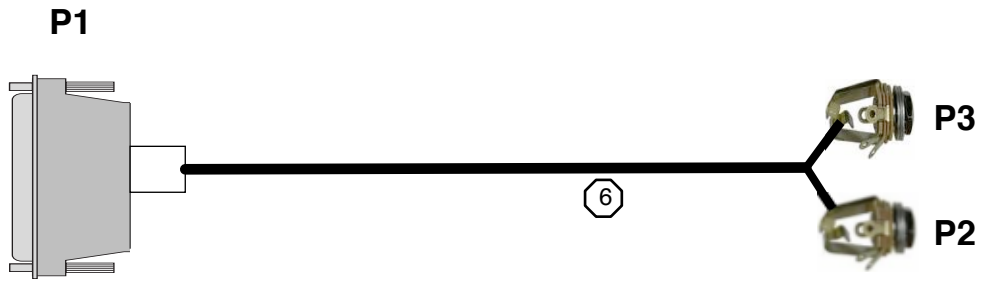

Assembly Notes

- (1) P1: DB-15, use high quality supplier such as AMP or equivalent.
- (2) P2: Use Switchcraft 0.25" type 11 2-pole chassis mount jack socket
- (3) P3: Use Switchcraft 0.206" type S12B 3-pole chassis mount jack socket
- (6) Use 1192A star quad cable. Pair 1 (TP1) Blue and Blue w/ White-stripe, pair 2 (TP2) White and White w/ Blue stripe
- (7) Cable Length "L" specified by installation requirements.
- (8) Tie shield to Pin 8 at the D15 end. Pairs must be connected as shown.

Rev	Date	Originator	Description
01	9-19-07	NAK	Original Release - for use with Telex Airman 750
02	04-20-09	CJA	Added Information Table, converted to graffle

ADVANCED SIMULATION TECHNOLOGY inc.
 500A Huntmar Park Drive, Herndon, VA 20170
www.asti-usa.com

Cage Code	OVPFW3
Title	Audio Cable to IRIS to Airman 750
Dwg #	CA-D15M-Y-Q2FP-Q3FP-L-A_02
Sheet	1 of 1

Industry connector Sub Group	ASTi Part Number Sub Group	Source Device	ASTi Part Number	Current Revision Number	Description & Case Use	Special Notes
DB15	D15*	ACU, ACU2	CA-D15M-Y-Q2FP-Q2FP-L-A	02		