


Cable Layout: ⑤

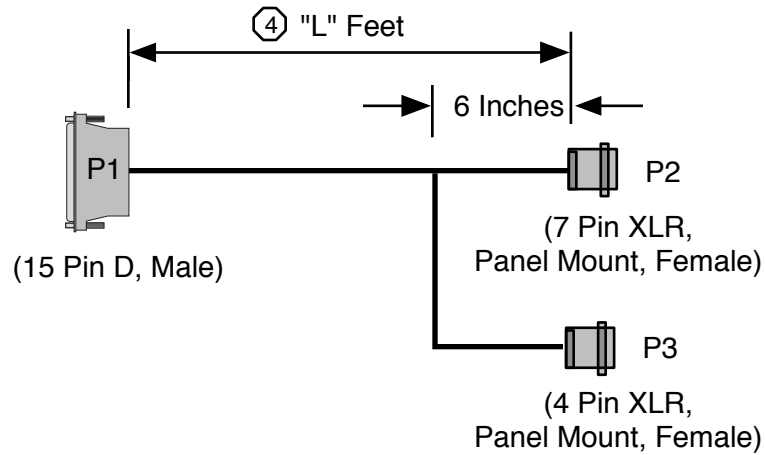


Parts List:

Item	Qty	Reference	P/N	Mfg	Description	Notes
1	1	P1	XXX-XXXX	XXXXXXX	15-pin Male D-shell	1
2	1	P2	NC7FP	Neutrik	7-Pin Female XLR, Panel Mount	2
3	1	P3	NC4FP	Neutrik	4-Pin Female XLR, Panel Mount	2
4	AR	-			Audio Cable	3
-	-	-				


Notes:

- ① Use high quality supplier such as AMP or equivalent.
- ② Use Neutrik connector only (mating connector is Neutrik).
No Substitutions.
- ③ Use low capacitance, shielded, twisted pair, high flex audio cable.
- ④ Cable length "L" defined by length field of part number ordered
- ⑤ Wiring and cable layout as shown.
- ⑥ Individually shielded twisted pair configuration as shown.
Straight or twisted pair cable may be used for Digital I/O Connections. Note shield connections to XLR lugs.

Wiring Information: ⑤

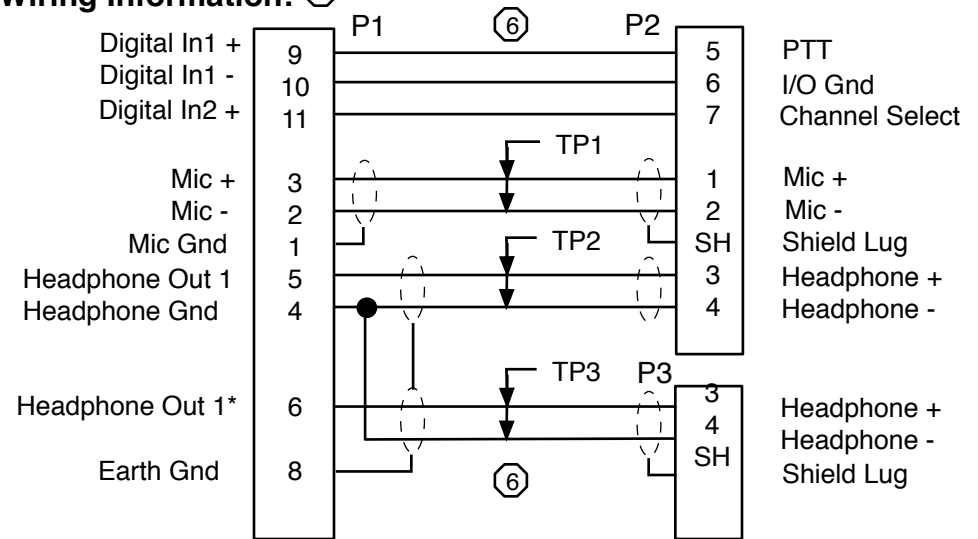

Rev	Date	Originator	Description
-	7-5-04	JPM	Original release
02	4-20-09	CJA	Added Information Table

 ADVANCED SIMULATION TECHNOLOGY inc. 500A Huntmar Park Drive, Herndon, VA 20170 www.asti-usa.com	
Cage Code	OVFW3
Title	Audio Cable IRIS to Footswitch & Headset
Dwg #	CA-D15M-Y-X4FP-X7FP-L-A_02
Sheet	1 of 1

Industry connector Sub Group	ASTi Part Number Sub Group	Source Device	ASTi Part Number	Current Revision Number	Description & Case Use	Special Notes
DB15	D15*	ACU, ACU2	CA-D15M-Y-X4FP-X7FP-L-A	02		