



Cable Layout:

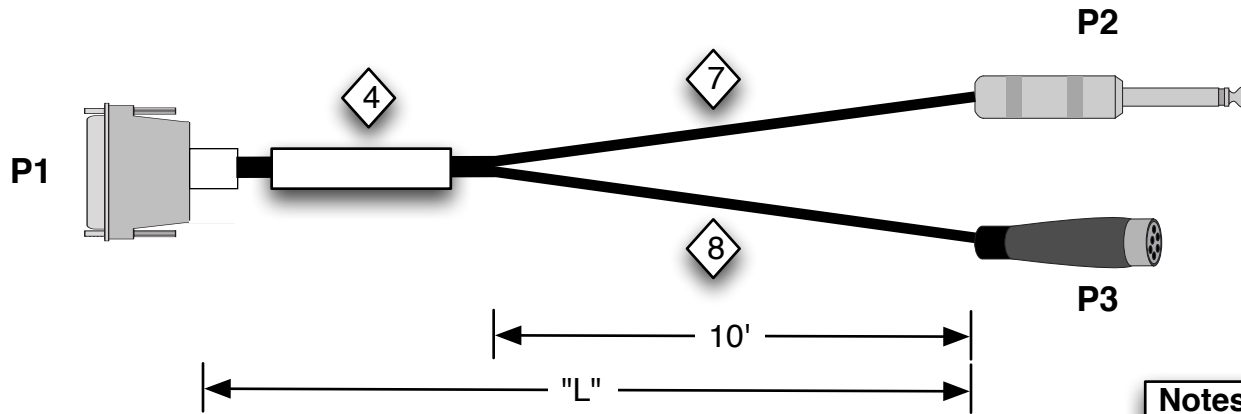

CA-D15M-Y-X6F-Q2M-L-A_02

Length in feet


Wiring Information:

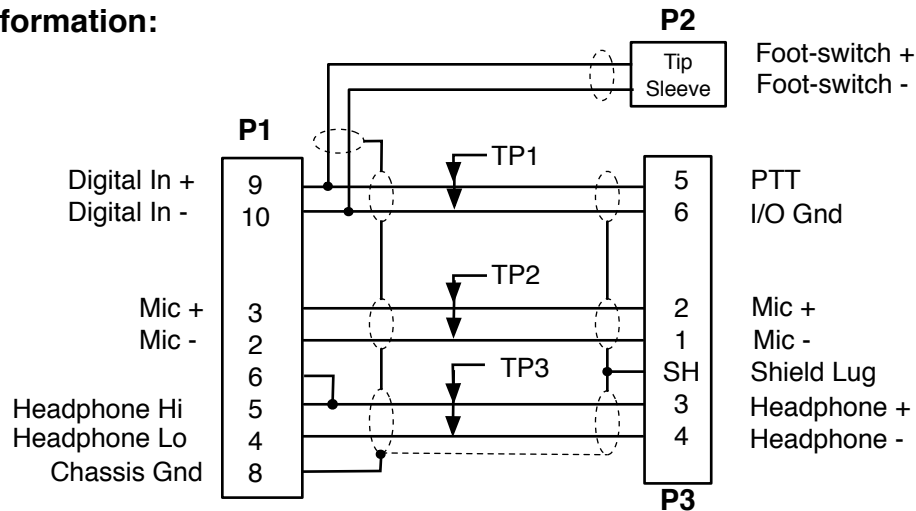

Notes:

1. Use high quality supplier such as AMP or equivalent male D15 connector.
2. P3: Use Neutrik 6pin XLR female connector only. No Substitutions.
3. P2: 1/4" phono male connector
4. Apply clear heatshrink and label with cable part number
5. Cable length "L" defined by length field of part number ordered
6. Tie ALL shields to Pin 8 at the D15 end. Pairs must be connected as shown. Unused pairs are not connected.
- 7 Use Canare **L-2E5** audio cable.
- 8 Use Canare **MR202-4AT** audio cable.

Rev	Date	Originator	Description
01	11-16-06	NAK	Original release
02	4-21-09	CJA	Added information table, converted to graffle

		ADVANCED SIMULATION TECHNOLOGY inc. 500A Huntmar Park Drive, Herndon, VA 20170 www.asti-usa.com
Cage Code	OVFW3	
Title	Audio Cable IRIS to PTT box and Footswitch	
Dwg #	CA-D15M-Y-X6F-Q2M-L-A_02	
Sheet	1 of 1	

Industry connector Sub Group	ASTi Part Number Sub Group	Source Device	ASTi Part Number	Current Revision Number	Description & Case Use	Special Notes
DB15	D15*	ACU, ACU2	CA-D15M-Y-X6F-Q2M-L-A	02		