



Length in Feet

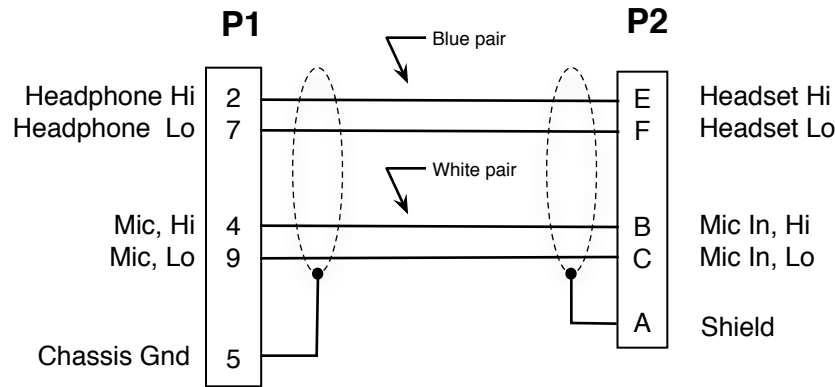

Assembly Notes

- (1) P1: Male, metal, DB-9 connector. Includes metal chrome backshell, strain relief & male screwlock assembly.
- (2) P2: Cable-mount, female, miniature cylindrical connector, strain relief.
- P/N: MS34741W10-6S
- (3) Cable: Low capacitance, shielded, star-quad, high flex, audio cable. Belden P/N: 1192A
- (4) Cable Length specified by value of L in P/N. Units are in feet.
- (5) Wire as shown in schematic - note drain wire connections.
- (6) Tie Pin 2 and shield to Pin 8 as indicated

Rev	Date	Originator	Description
01	02-15-06	NAK	Original
02	04-03-09	CJA	Added Information Table



ADVANCED SIMULATION TECHNOLOGY inc.
 441-A Carlisle Drive, Herndon, VA 20170
www.asti-usa.com

Cage Code	OVPFW3
Title	Audio Interface Cable, - RIU to Jam Nut Receptacle
Dwg #	CA-D9M-S16-ITT-L-A_02
Sheet	1 of 1

Industry connector Sub Group	ASTi Part Number Sub Group	Source Device	ASTi Part Number	Current Revision Number	Description & Case Use	Special Notes
DB9	D9*	RIU, ACE-RIU	CA-D9M-S16F-ITT-L-A	02		