


P1

P2


P/N: CA-D9M-X3FP-L-A_02

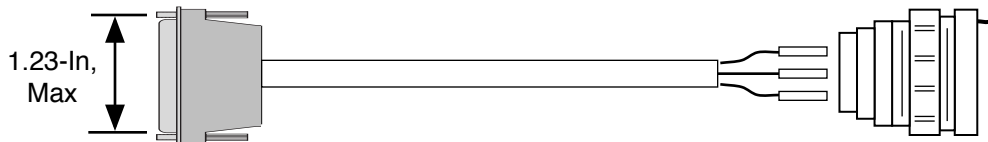

1.23-In,
Max

Requires 1.25-inch dia.
minimum mounting hole.


See Switchcraft catalog for
mounting details.



Length in Feet

Wiring Diagram


Pins Not Shown Are Unused

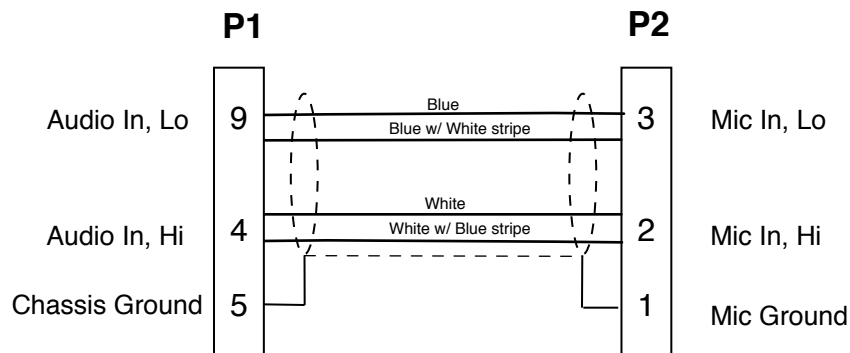

Assembly Notes

- (1) P1: Use male, metal, DB-9 connector. Connector to include backshell and male screwlock assembly with thumb screws.
- (2) P2: Use switchcraft P/N B3F (3pin XLR female, panel mount)
- (3) Use high quality, low capacitance, star-quad shielded audio cable Beldon 1192A or equivalent.
- (4) no substitutions for P1 and P2.

Rev	Date	Originator	Description
01	10-25-07	NAK	original release
02	4-6-09	CJA	Added Information Table

 ADVANCED SIMULATION TECHNOLOGY inc. 500A Huntmar Park Drive, Herndon, VA 20170 www.asti-usa.com	
Cage Code	OVSFW3
Title	Audio Interface Cable, RIU to Headset, Panel Mount
Dwg #	CA-D9M-X3FP-L-A_02
Sheet	1 of 1

Industry connector Sub Group	ASTi Part Number Sub Group	Source Device	ASTi Part Number	Current Revision Number	Description & Case Use	Special Notes
DB9	D9*	RIU, ACE-RIU	CA-D9M-X3FP-L-A	02		