



P1

P2

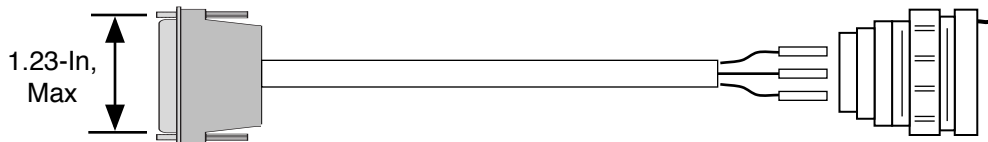

Requires 1.25-inch dia.
minimum mounting hole.

See Switchcraft catalog for
mounting details.




P/N: CA-D9M-X4FP-L-B_04

Length in Feet

Wiring Diagram


Pins Not Shown Are Unused

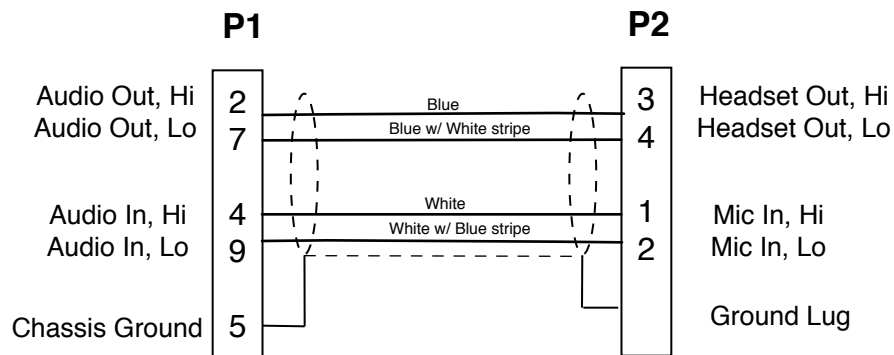

Assembly Notes

- (1) P1: Use male, metal, DB-9 connector. Connector to include backshell and male screwlock assembly.
- (2) P2: Use switchcraft P/N B4F (4pin XLR female, panel mount)
- (3) Use high quality, low capacitance, star-quad shielded audio cable Beldon 1192A or equivalent.
- (4) no substitutions for P1 and P2.

Rev	Date	Originator	Description
01	2-15-00	NKW	original release
02	5-11-01	SEG	Changes grounding at P1 & P2. Clarifies notes and mech drw of P2
03	12-13-04	NAK	Changed cable type
04	4-6-09	CJA	Added information table

 ADVANCED SIMULATION TECHNOLOGY inc. 500A Huntmar Park Drive, Herndon, VA 20170 www.asti-usa.com	
Cage Code	OVSFW3
Title	Audio Interface Cable, RIU to Headset, Panel Mount
Dwg #	CA-D9M-X4FP-L-B_04
Sheet	1 of 1

Industry connector Sub Group	ASTi Part Number Sub Group	Source Device	ASTi Part Number	Current Revision Number	Description & Case Use	Special Notes
DB9	D9*	RIU, ACE-RIU	CA-D9M-X4FP-L-B	04		