

**Cable Layout:**

**P/N: CA-Q2M-P3M-L-A\_02**


P1: 1/4" 2 Cond

P2: 3.5 mm 3 Cond.

Length Options:  
 10 Feet L=10  
 25 Feet L=25



**Wiring Information:**

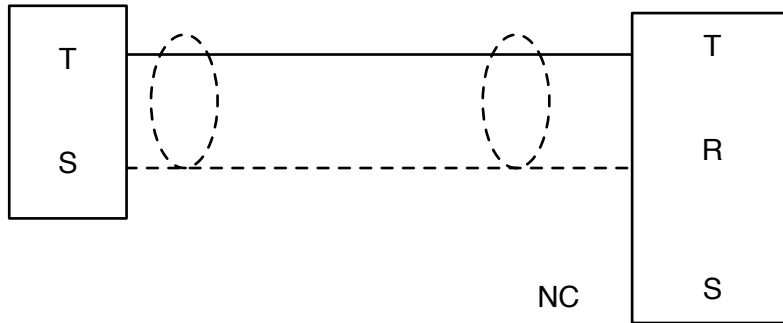


**Assembly Notes / Parts List:**

- 1. P1:** Use (Switchcraft P/N 280 or equivalent). Equivalent part will include: Nickel plated / knurled shell, 1/4" Mono (TS) plug, solder lugs, cable clamp.
- 2. P2:** Use (Switchcraft P/N 35 HDNN or equivalent). Equivalent part will include: nickel plated / knurled shell, 3.5mm stereo (TRS) plug, solder lugs, cable clamp.
- 3. Cable:** Use Whirlwind PN WSNPVC or equivalent. Equivalent part will include: (1) conductor with braid shield, min 20 AWG / stranding 27X34, OD = .24", polyethylene insulation, high flexibility matte black PVC jacket.

**Notes:**

1. Connects Boss Footswitch to AIU-01 PTT Jack
2. Old Part Number: CBL-FS

Rev	Date	Originator	Description
-	03/22/00	CEM	Original Release
02	04/20/09	JBN	Converted to .graffle, added chart, made pretty

		ADVANCED SIMULATION TECHNOLOGY inc. 500A Huntmar Park Drive, Herndon, VA 20170 www.asti-usa.com
Cage Code	OVFW3	
Title	Cable Assembly, 1/4-Inch to 3.5mm	
Dwg #	CA-Q2M-P3M-L-A_02	
Sheet	1 of 1	

Industry Connector Sub Group	ASTi Part Number Sub Group	Source Device	ASTi Part Number	Current Revision Number	Description & Use Case	Special Notes
1/4"	Q2*, Q3*		CA-Q2M-Q2M-L-A	02		