



Cable Layout:

P/N: CA-X4M-Y-X4F-P3F-L-A_02

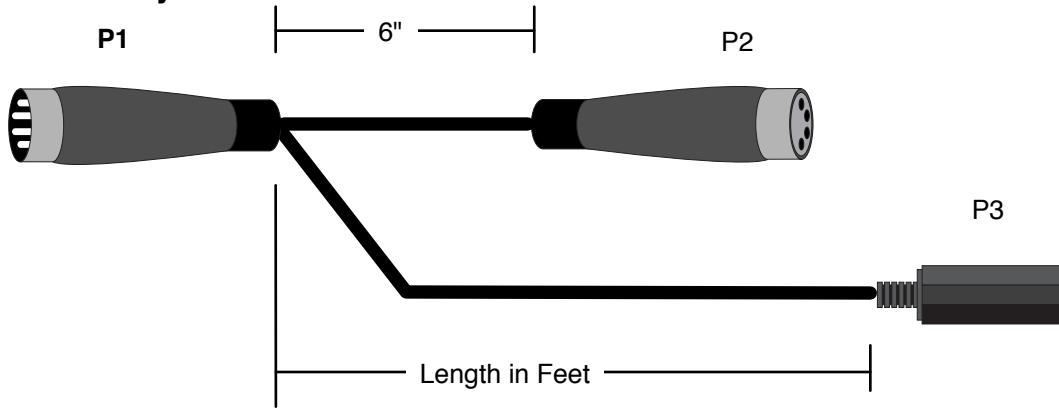

Length in Feet


Wiring Information:

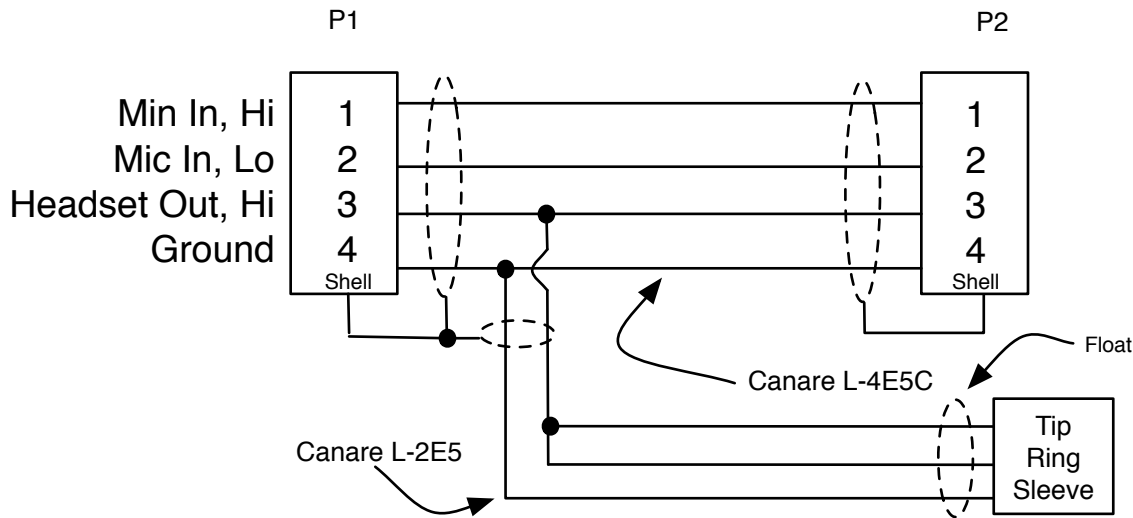

Notes:

1. P1: Male, XLR, 4Pin, chrome shell, strain relief.
2. P2: Female, XLR, 4Pin, schrome shell, strain relief
3. P3: Female, 3.5mm mini-jack
4. Cable: High flex audio cable.
- PN#: Canare L-2E5
- PN#: Canare L-4E5C
5. Cable Length specified by value of L in P/N. Units are in feet.
6. Connect all cable shields to XLR housings.
7. Float shield connection at P3

Rev	Date	Originator	Description
01	11/01/05	NAK	Original Release
02	04/13/09	JBN	Added chart, made pretty, converted to .graffle

		ADVANCED SIMULATION TECHNOLOGY inc. 500A Huntmar Park Drive, Herndon, VA 20170 www.asti-usa.com
Cage Code	OVFW3	
Title	Radius to Headset & PC Speaker	
Dwg #	CA-X4M-Y-X4F-P3F-L-A_02	
Sheet	1 of 1	

Industry Connector Sub Group	ASTi Part Number Sub Group	Source Device	ASTi Part Number	Current Revision Number	Description & Use Case	Special Notes
XLR4	X4*		CA-X4M-Y-X4F-P3F-L-A	02		